




## 45 DEGREE REBATED BEND - ISOKERN PUMICE

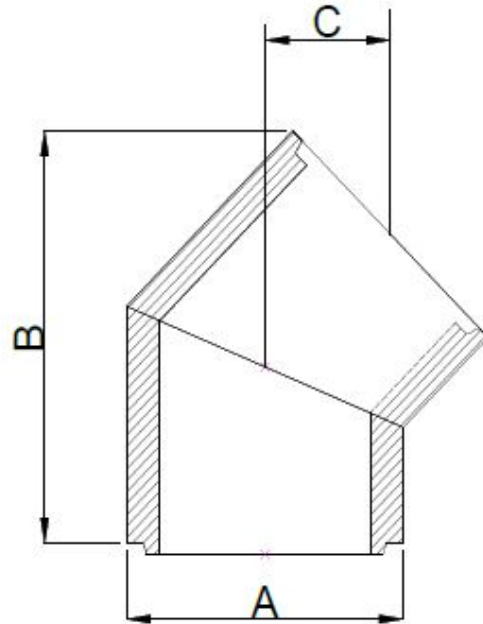

For lining masonry chimneys. Suitable for use in negative pressure (Dry Chimney) applications. CE Designation (T450 N2 D 3 G)

### Features and Benefits

- Pumice Concrete
- Highly Insulated
- Lightweight
- Resistance to temperature changes
- To create any steep offset
- Easy to Use
- Better performance

### VARIATIONS

SKU	Price	Int mm	A	B
126367		150	200	600
126497		175	235	600
127681		200	250	600
127708		225	185	600
128532		250	310	600
131819		300	360	600
131820		350	416	600



## PRODUCT DESCRIPTION

**Pumice is a natural insulator; this is the unique property that separates pumice from all other chimney material.**

Schiedel Isokern is noteworthy for its flue and chimney products manufactured using high quality pumice which is recognised throughout Europe and USA.

### SCHIEDEL ISOKERN OFFERS:

- The unique feature of Schiedel Isokern against other chimney systems is that pumice is known for its natural insulating properties.
- Pumice allows the flue gases in the chimney to quickly reach their optimum temperature enabling the heating appliance to reach its optimum performance shortly after lighting.
- It keeps the chimney warmer longer as the heat output of the appliance decreases, once again aiding performance and reducing the likelihood of condensation and soot build-up.
- ISOKERN is a well reputed brand known for its durability, reliability and long lasting, robust performance, under the Schiedel product portfolio.
- We have the Largest collection of masonry chimney & fire chest products
- Our products are CE marked
- Our products are tested to the appropriate EN standards

Isokern Pumice Double Module DM is CE Certified to EN1858 TÜV Cert no. 0036 CPR 90219 001

Isokern Pumice Chimney Liner is CE certified to EN1857 TÜV Cert no. 0036 CPR 90219 002

Isokern Magnum Firechest has been tested at the Fraunhofer Institut, Stuttgart, Cert no. P8-094/2006

### CE Designation

Double Module DM System Chimney\* T450 N1 D 3 G(00)

Pumice Chimney Liner T600 N2 D 3 G

\* Zero distance to combustibles on straight chimney systems with ventilated terminal. 38mm distance to combustibles on offset systems. and non ventilated systems.



PDF

[Isokern Brochure](#)

File size 8.18 MB

[Download](#)



PDF

[Magnum Firechest installation instructions](#)

File size 900.56 KB

[Download](#)



PDF

[Garden Fireplace 500 build guide](#)

File size 23.88 MB

[Download](#)



PDF

[Garden Fireplace 950 build guide](#)

File size 3.38 MB

[Download](#)



PDF

[Garden Fireplace 1200 build guide](#)

File size 4.04 MB

[Download](#)



PDF

[Celsius stove brochure](#)

File size 1.25 MB

[Download](#)



ZIP



ZIP



[Isokern Pumice bends DWG files](#)

File size 3.19 MB

[Download](#)

[Manor Gather DWG files](#)

File size 4.42 MB

[Download](#)

**A useful app with guides on installation as well as step-by-step video guides.**

This app was designed for installers to have all the information they require in a few quick clicks. This makes it easier for installers rather than having to carry paperwork during the installation process with video breakdowns of each stage of the installation process.

Download the iPhone and iPad version in the App Store and Android version in the Google Play Store.

