




## Adjustable Trim Collar 35-45° - Perimeter Smooth

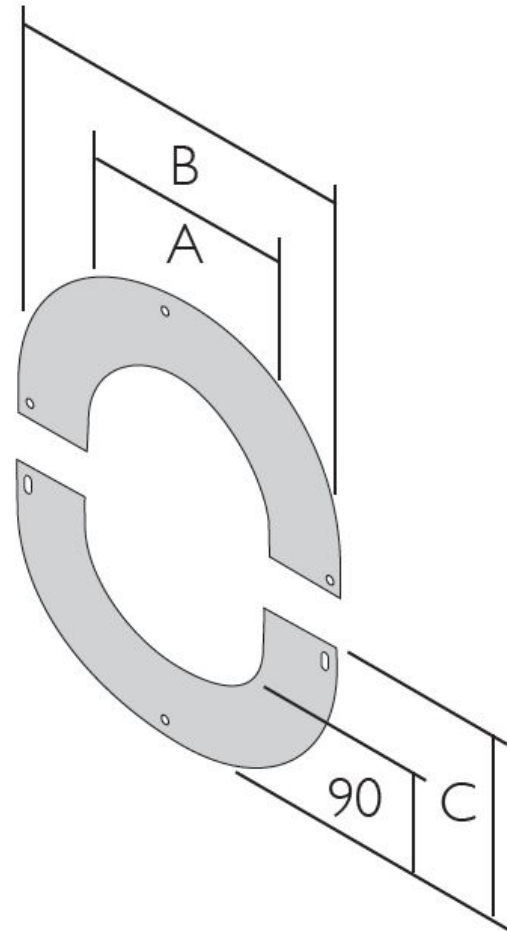

Schiedel PERMETER SMOOTH, the advanced double-wall system that is designed with installers in mind.

The simple push-fit connection means that locking bands are not required, which improves both style and functionality.

There is no need for any thermal insulation or on-site welding work, as Perimeter Smooth comes with all the accessory range needed for internal and external installations.

**PERMETER SMOOTH PRODUCT FEATURES**

- Locking bands not required
- Corrosion resistant stainless steel
- Painted black
- Dense, superwool insulation
- Full range of accessories
- Up to 1200 °C heat resistant

**EASY TO FIT AND ADDITIONAL SAFETY**

Perimeter Smooth features a distinctive SuperWool insulation that maintains its properties even under extreme temperatures, reaching up to 1200°C. Perimeter Smooth's thermal expansion capability of up to 18mm ensures that it retains its structural



integrity

**VARIATIONS**

SKU	Int mm	Ext mm	A	B	C	Price
177328	130	180	184	364	249.5	
177329	150	200	204	384	262	

**PRODUCT DESCRIPTION**

Specification	Data
Diameter (internal)	130-200
Diameter (external)	180-250
Wall thickness (internal)	0.5mm
Insulation thickness per diameter	25mm
Weight per diameter (kg/m)	5.8 kg /m - 8.4 kg/m
Outer case thickness	0.6mm
Flue gas temp (dry)	450°C
Inner liner material:	high grade stainless steel liner 444 : 1.4521
Outer case material:	Painted black (RAL 9005)
Insulation type:	Superwool blanket
Thermal expansion	18mm
Max. length free standing:	2.0 m above the last support
Max. support spacing	3.0 m
Average thermal resistance (200°C)	0.37m <sup>2</sup> k/W

**CORROSION RESISTANCE**


Chimneys are subject to significant corrosion attack by flue gas condensates, particularly from solid fuel. Perimeter Smooth is specifically designed and manufactured to resist this corrosion.

**CHIMNEY DIAMETER**

The chimney size should be as recommended by the appliance manufacturer. Where there is a requirement for a flue diameter smaller than the appliance spigot, then the operational requirements of the appliance and the configuration of the flue must satisfy the flue sizing requirements of EN13384-1 for single appliances, and EN13384-2 for multi appliances.



For stove and chimney installers – whenever you register an installation with our easy to use, online guarantee registration portal, you will now accrue points based on the number of installations and installation type. So start to register your installations, taking full advantage of our Lifetime Guarantee on Flex and ICID, as well as guarantees on all our other ranges, and to start earning points

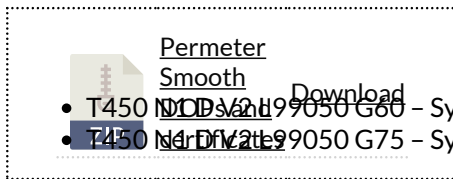

Perimeter Smooth is CE Certified to EN 1856-1:2009 with designations:

- T450 NCD 350 G60 – System chimney (Ø130 & 150mm)
- T450 NCD 350 G75 – System chimney (Ø180 & 200mm)

Warranty is 10 years,



**FREE Access to advanced CAD modelling files.**

Please visit our external BIM (Business Information Modelling) for access to advanced modelling files in a number of formats. Please note that you will have to register and login for access to the files.

[Click here to access our BIM files.](#)