




87 Degree Bend - UE

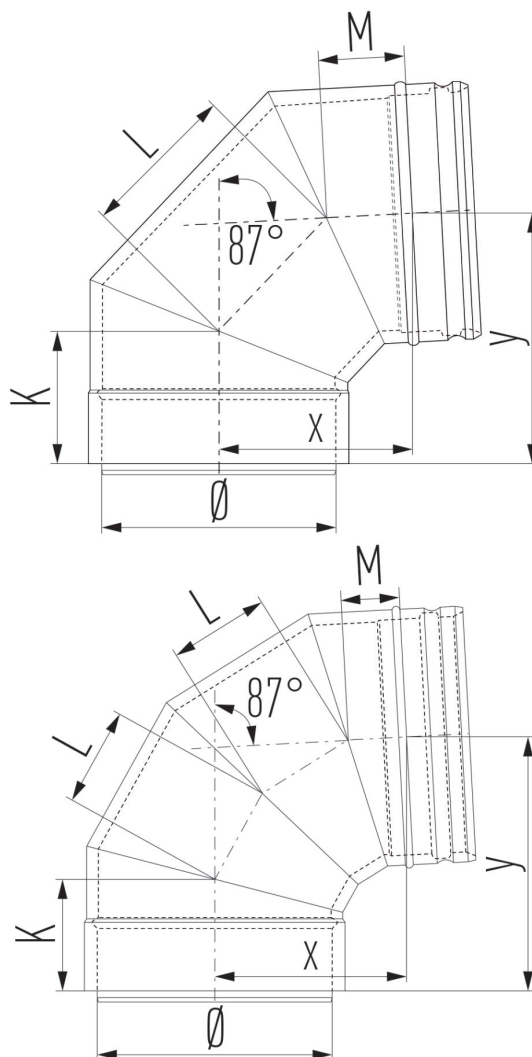

The Metaloterm UE system is a modular twin wall flue system, made of stainless steel with an air gap insulation and sealing ring.

Metaloterm UE is suitable for low temperatures, condensing and non-condensing applications with flue gasses in positive or negative pressure. The system is suited for a wide range of applications such as condensing heaters and boilers, gas-fired stoves and ventilation systems.

Applications

- Gas fired stoves
- Oil fired stoves
- Industrial ventilation systems
- Air inlet or ventilation system
- Condensing heaters and boilers
- Atmospheric gas-fired boilers

Advantages



- Universal applicable flue-system
- Compatible with Metaloterm ME, Metaloterm MF
- Pressure-tight up to 5000 Pa
- Inner- and outer wall from high quality stainless steel
- Stress free thermal expansion
- Extremely low heat mass maintains draught and allows longer runs of installed flue

VARIATIONS

SKU	Int mm	K	L	_M	X	Y	Price
163274	080	75	75	40	90	130	
163275	100	80	80	45	100	140	
163276	130	85	90	50	110	150	
163277	150	85	60	50	110	170	
163278	180	85	75	50	150	190	
163279	200	85	80	50	155	200	
163280	250	95	95	60	185	230	

PRODUCT DESCRIPTION

The Metaloterm® UE system is a modular twin wall flue system, made of stainless steel with an air gap insulation and sealing ring. Metaloterm® UE is suitable for low temperatures, condensing and non- condensing applications with flue gasses in positive or negative pressure. The system is suited for a wide range of applications such as condensing heaters and boilers, gas-fired stoves and ventilation systems.

 UE brochure Download	UE DXF files Download
 UE DOPs and certificates Download	CE approved EN 1856-1: T200 P1/H1 W V2 L50040 O25 T250 N1 W V2 L50040 O25 T400 N1 W V2 L50040 O130 T400 N1 D V3 L50040 G130

CE approved | EN 1856-2

T200 P1/H1 W V2 L50040 O50 M
T400 N1 W V2 L50040 O200 M
T400 N1 D V3 L50040 G200 M