




Insulation 42/432/333

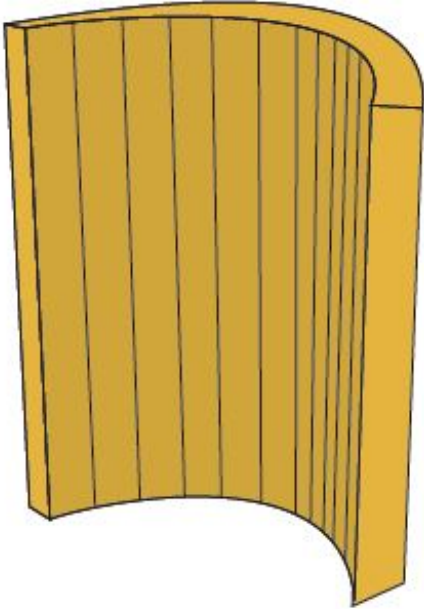

This product is part of the Schiedel range of Ceramic Flue Liners, which have been tested and approved to meet the latest European Standards and Construction Product Regulations (CPR) for both High Temperature and Low Temperature applications.

PRODUCT DESCRIPTION

Schiedel SWIFT Modular 3 layer insulated chimney system

Traditionally, chimneys are completely constructed on site with separate components sourced from a number of suppliers and most likely from a variation of manufacturers. By contrast the Schiedel Swift System offers modular, prefabricated units to speed construction and facilitate consistent quality standards.

Features

- Designed for speed of construction
- Suitable for Timber Frame, Steel Frame and Masonry construction. Solutions have been specifically designed to meet the requirement of timber framed construction.
- Modular units for easy assembly on site.
- Suitable for all fuels – gas, oil, solid fuels and biomass.
- Schiedel Rapid HT Cement is provided in tubes for ease of application.
- Superior Insulation – The consistency of the insulation maintains the temperature of the flue gases allowing them to pass freely up the chimney. Back filling of insulation is not required.
- The use of a chimney tray is always recommended.
- The high quality fireclay flue liner complies with the European Standard EN1457-1 & 2