




Insulation - Ceramic Liners

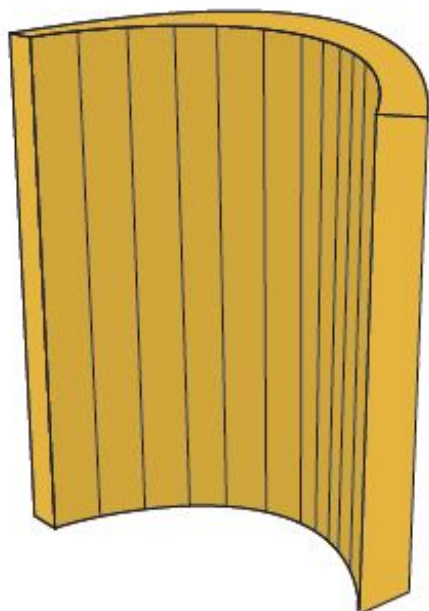

This product is part of the Schiedel range of Ceramic Flue Liners, which have been tested and approved to meet the latest European Standards and Construction Product Regulations (CPR) for both High Temperature and Low Temperature applications.

VARIATIONS

SKU	Height	Int mm	Price
100379	2 Per Chimney Block	180	£9.02 ex. VAT
100380	2 Per Chimney Block	200	£6.08 ex. VAT
157943	1 Per Chimney Block	160	£2.24 ex. VAT

PRODUCT DESCRIPTION

Schiedel SWIFT Modular 3 layer insulated chimney system

Traditionally, chimneys are completely constructed on site with separate components sourced from a number of suppliers and most likely from a variation of manufacturers. By contrast the Schiedel Swift System offers modular, prefabricated units to speed construction and facilitate consistent quality standards.

Features

- Designed for speed of construction
- Suitable for Timber Frame, Steel Frame and Masonry construction. Solutions have been specifically designed to meet the requirement of timber framed construction.
- Modular units for easy assembly on site.
- Suitable for all fuels – gas, oil, solid fuels and biomass.
- Schiedel Rapid HT Cement is provided in tubes for ease of application.



SCHIEDEL CHIMNEY SYSTEMS LTD. PRODUCT TECHNICAL DATA SHEET



- Superior Insulation – The consistency of the insulation maintains the temperature of the flue gases allowing them to pass freely up the chimney. Back filling of insulation is not required.
- The use of a chimney tray is always recommended.
- The high quality fireclay flue liner complies with the European Standard EN1457-1 & 2








For stove and chimney installers – whenever you register an installation with our easy to use, online guarantee registration portal, you will now accrue points based on the number of installations and installation type. So start to register your installations, taking full advantage of our Lifetime Guarantee on Flex and ICID, as well as guarantees on all our other ranges, and to start earning points

A useful app with guides on installation as well as step-by-step video guides.

This app was designed for installers to have all the information they require in a few quick clicks. This makes it easier for installers rather than having to carry paperwork during the installation process with video breakdowns of each stage of the installation process.

Download the iPhone and iPad version in the App Store and Android version in the Google Play Store.



 Ceramic UK brochure Download	 Ceramic Ireland brochure Download	 Ceramic DWG files Download
 Swift DWG files Download		
 Ceramic DOPs and certificates Download		

Schiedel Ceramic Liners are CE Certified to EN 1457-1 & 2 TÜV 0780 CPD 131086 with the following designations:

High Temperature Applications

EN 1457-1

A1 N1 (T600 N1 G) EN 13063-1

T400 N1 D 3 G40 Ø160mm T400 N1 D 3 G50 Ø200mm

Low Temperature Applications



EN 1457-2
B4 N1 (T400 N1 WC O)
D4 N1 (T200 N1 WC O)*
EN 10363-2
T400 N1 W 2 O50
T200 N1 W 2 O00

High Temperature Applications – For Room Sealed appliances

EN 13063-3
T400 N1 D3 G40 Ø160mm T400 N1 D3 G50 Ø200mm

* When used on T200 rated low temperature systems, the liner system should be straight and fully ventilated.