




Roll Top Pots

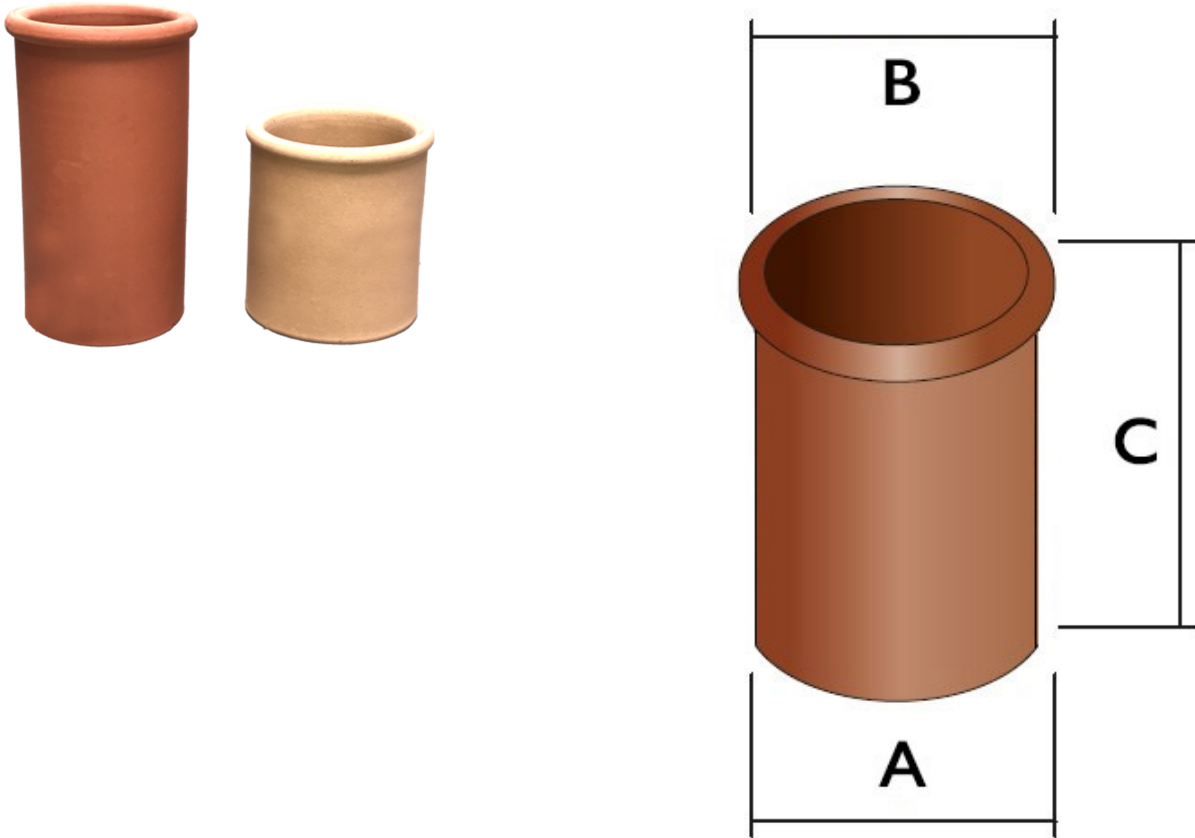

Terracotta Chimney Pots are for terminating a chimney. Manufactured in accordance with BS EN 13502-2002.

Features and Benefits

Freeze/ Thaw Resistant → Aesthetically pleasing

Terracotta or Buff → Can fit a topguard easily

6 Diameters Available → Long lasting terminal

**VARIATIONS**

SKU	Int mm	Colour	A	B	C	Price
126370	150	Buff	185	200	450	£75.32 ex. VAT
126371	150	Terracotta	185	200	450	£75.32 ex. VAT
130697	200	Buff	245	270	450	£78.76 ex. VAT
127341	200	Terracotta	245	270	450	£78.76 ex. VAT



SKU	Int mm	Colour	A	B	C	Price
127702	225	Buff	270	280	300	£60.41 ex. VAT
127713	225	Terracotta	270	280	300	£60.41 ex. VAT
127711	225	Buff	275	290	450	£78.76 ex. VAT
127714	225	Terracotta	275	290	450	£78.76 ex. VAT
128543	250	Terracotta	300	315	450	£94.48 ex. VAT
128544	250	Buff	300	315	450	£94.48 ex. VAT
129035	300	Terracotta	360	380	450	£154.50 ex. VAT
129034	300	Buff	360	380	450	£128.75 ex. VAT
129359	350	Terracotta	410	420	450	£230.06 ex. VAT
129358	350	Buff	410	420	450	£230.06 ex. VAT

## PRODUCT DESCRIPTION

**Ceramic has a number of advantages.**

The ceramic range of liners and accessories are a cost effective way of safely adding a chimney into an building development, or adding a chimney to an existing renovation.

**Resistant to Thermal Shock** - The liners are extremely durable and have been tested for resistance to soot fire as well as to condensate, and meet the latest CE standards and Construction Products Regulations (CPR).

**Lightweight** - Due to advanced manufacturing techniques, we have been able to reduce the wall thickness of the liner to produce the optimal lightweight but extremely robust product.

**Smooth Inner Wall** - The smooth inner liner allows gas, the product of combustion to freely exit the chimney. Straight lines ensure a consistent fill of insulation.

- BIM object - Ceramic 200mm liner with an external brick chimney
- BIM object - Ceramic chimney system for an internal house



For stove and chimney installers – whenever you register an installation with our easy to use, online guarantee registration portal, you will now accrue points based on the number of installations and installation type. So start to register your installations, taking full advantage of our Lifetime Guarantee on Flex and ICID, as well as guarantees on all our other ranges, and to start earning points



Isokern  
 Pumice  
 DOPs and  
 certificates

[Download](#)

Isokern Pumice Double Module DM is CE Certified to EN1858 TÜV Cert no. 0036 CPR 90219 001  
 Isokern Pumice Chimney Liner is CE certified to EN1857 TÜV Cert no. 0036 CPR 90219 002  
 Isokern Magnum Firechest has been tested at the Fraunhofer Institut, Stuttgart, Cert no. P8-094/2006

### CE Designation

Double Module DM System Chimney\* T450 N1 D 3 G(00)  
 Pumice Chimney Liner T600 N2 D 3 G

\* Zero distance to combustibles on straight chimney systems with ventilated terminal. 38mm distance to combustibles on offset systems. and non ventilated systems.



Isokern  
 Brochure

[Download](#)



Magnum  
 Firechest  
 installation  
 instructions

[Download](#)



Isokern  
 Pumice  
 bends  
 DWG  
 files

[Download](#)



Manor  
 Gather  
 DWG  
 files

[Download](#)