




Steel Collar - Isokern Pumice

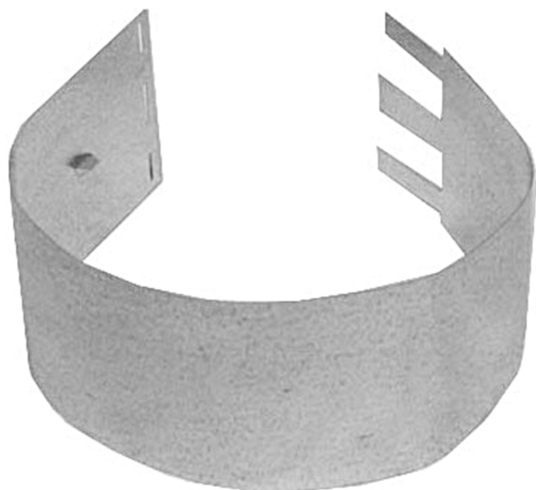

For Cut Lengths of Pumice Liners. CE Designation (T450 N2 D 3 G)

Features and Benefits

Flat packed → Helps create any offset distance

Galvanized Steel → Easy to use for cut joints

VARIATIONS

SKU	Int mm	Colour	A	B	Price
126361	150	Plain	Any A	150	£6.15 ex. VAT
126494	175	Plain	730	150	£7.73 ex. VAT
127673	200	Plain	812	150	£7.98 ex. VAT
127705	225	Plain	915	150	£9.64 ex. VAT
128533	250	Plain	993	150	£11.08 ex. VAT
129021	300	Plain	1161	150	£13.30 ex. VAT
129356	350	Plain	1331	150	£15.55 ex. VAT

PRODUCT DESCRIPTION


Pumice is a natural insulator; this is the unique property that separates pumice from all other chimney material.

Schiedel Isokern is noteworthy for its flue and chimney products manufactured using high quality pumice which is recognised throughout Europe and USA.



SCHIEDEL ISOKERN OFFERS:

- The unique feature of Schiedel Isokern against other chimney systems is that pumice is known for its natural insulating properties.
- Pumice allows the flue gases in the chimney to quickly reach their optimum temperature enabling the heating appliance to reach its optimum performance shortly after lighting.
- It keeps the chimney warmer longer as the heat output of the appliance decreases, once again aiding performance and reducing the likelihood of condensation and soot build-up.
- ISOKERN is a well reputed brand known for its durability, reliability and long lasting, robust performance, under the Schiedel product portfolio.
- We have the Largest collection of masonry chimney & fire chest products
- Our products are CE marked
- Our products are tested to the appropriate EN standards

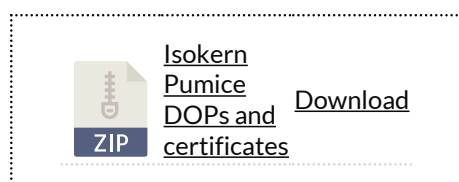

Isokern Pumice Double Module DM is CE Certified to EN1858 TÜV Cert no. 0036 CPR 90219 001

Isokern Pumice Chimney Liner is CE certified to EN1857 TÜV Cert no. 0036 CPR 90219 002

Isokern Magnum Firechest has been tested at the Fraunhofer Institut, Stuttgart, Cert no. P8-094/2006

CE Designation

Double Module DM System Chimney* T450 N1 D 3 G(00)

Pumice Chimney Liner T600 N2 D 3 G

* Zero distance to combustibles on straight chimney systems with ventilated terminal. 38mm distance to combustibles on offset systems. and non ventilated systems.

