




Vantage Locking bands / Guy wire bands

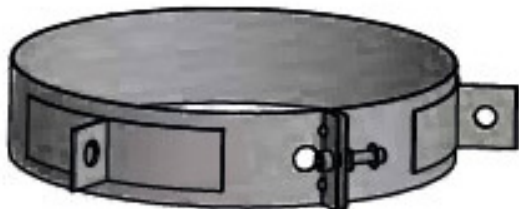

Stocks available. Please contact us on 0191 4161150 or email sales.uk@schiedel.com to purchase this product. List pricing is shown below.

Download the brochure for dimensions and other details.

	Vantage	1	
	Twin	6	
	Download	5	
	Wall Flue	4	
		5	WB_INST_HAN 125/50/1/304/BA/EX
165406	WB_INST_HAN 125/50/0.3/304/BLACK/EX		5.23
165407	WB_INST_HAN 150/50/0.3/304/BA/EX		4.67
165408	WB_INST_HAN 150/50/0.3/304/BLACK/EX		5.84
165409	WB_INST_HAN 175/50/0.3/304/BA/EX		6.50
165410	WB_INST_HAN 175/50/0.3/304/BLACK/EX		8.13



SCHIEDEL CHIMNEY SYSTEMS LTD.
PRODUCT TECHNICAL DATA SHEET



165411	WB_INST_HAN 200/50/0.3/304/BA/EX	7.30
165412	WB_INST_HAN 200/50/0.3/304/BLACK/EX	9.14
165425	LOCK_BAND 125/___/0.5/304/BA/EX	2.46
165426	LOCK_BAND 125/___/0.5/304/BLACK/EX	3.07
165427	LOCK_BAND 150/___/0.5/304/BA/EX	2.46
165428	LOCK_BAND 150/___/0.5/304/BLACK/EX	3.07
165429	LOCK_BAND 175/___/0.5/304/BA/EX	2.46
165430	LOCK_BAND 175/___/0.5/304/BLACK/EX	3.07



SCHIEDEL CHIMNEY SYSTEMS LTD.
PRODUCT TECHNICAL DATA SHEET



165431	LOCK_BAN 200/___/0.5/304/BA/EX	2.46
165432	LOCK_BAND 200/___/0.5/304/BLACK/EX	3.07
165559	REINF_LOCK_BAND 125/250/0.8/304/BA/EX	10.89
165560	REINF_LOCK_BAND 125/250/0.8/304/BLACK/EX	13.63
165561	REINF_LOCK_BAND 150/250/0.8/304/BA/EX	11.37
165562	REINF_LOCK_BAND 150/250/0.8/304/BLACK/EX	14.21
165563	REINF_LOCK_BAND 175/250/0.8/304/BA/EX	12.68
165564	REINF_LOCK_BAND 175/250/0.8/304/BLACK/EX	15.85



165565	REINF_LOCK_BAND 200/250/0.8/304/BA/EX	13.04
165566	REINF_LOCK_BAND 200/250/0.8/304/BLACK/EX	16.29

Vantage is a quality twin wall chimney system with a quick lock jointing system. It is used for wood burning or for solid fuel stoves.

With a quick lock jointing system. The components have a twin wall construction with a male spigot and a female socket to provide simple and rapid installation.

With its fully sealed components, Vantage can be installed both internally and externally. Vantage is supplied with a ten year conditional warranty.

PRODUCT DESCRIPTION

Applications

- Gas-fired stoves
- Wood-fired stoves
- Approved solid fuels
- Oil-fired appliances

Key features

- 10 year warranty
- Suitable for internal and external applications Distance to combustibles 60mm (50mm in free air)
- Also available in black powder coated finish
- Easy to install Twist-lock system Weatherproof, fully sealed components High density, mineral wool insulation Made from high grade stainless steel
- 316L stainless steel inner wall for the highest corrosion resistance
- 304 stainless steel outer wall in an attractive, polished finish

Technical characteristics

Application	Chimney/Flue system
Operating mode	Dry
Pressure	Negative pressure
Operating Temperature	450 oC / 600 oC
Thermal Shock	1000 oC [max 30 min]
Inner Wall	material
	thickness
Outer wall	material



SCHIEDEL CHIMNEY SYSTEMS LTD.
PRODUCT TECHNICAL DATA SHEET



Insulation	thickness	0.5 mm			
	type	Mineral wool			
	thickness	25 mm			
Fuel Type	Wood/Gas/Oil/Approved Solid Fuels				
ID mm	125(5")	150(6")	175(7")	200(8")	
OD mm	175		200	230	250
Cross section cm2	123		177	241	314
Weight ±kg/m	5.5		6.5	7.5	8.0

Chimney diameter

The chimney size should be as recommended by the appliance manufacturer. Where there is a requirement for a flue diameter smaller than the appliance spigot, then the operational requirements of the appliance and the configuration of the flue must satisfy the flue sizing requirements of EN13384—1 for single appliances.

CE approved

EN1856: T450 N1 D V3 L50050 G50 [in free air]

EN1856: T450 N1 D V3 L50050 G60 [in a combustibile shaft with ventilated fire stops]

EN1856: T600 N1 D V3 L50050 G100 [in a combustibile shaft with ventilated fire stops]