





Vantage Tees and tee caps / condensate collectors

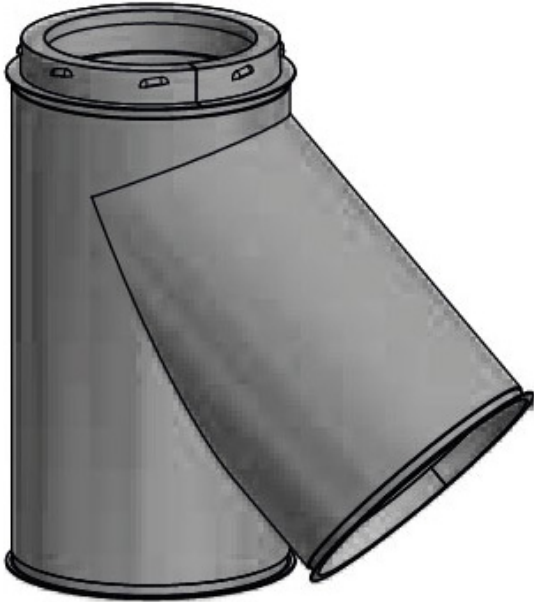

Stocks available. Please contact us on 0191 4161150 or email [sales.uk@schiedel.com](mailto:sales.uk@schiedel.com) to purchase this product. List pricing is shown below.

Download the brochure for dimensions and other details.

	<a href="#">Vantage Twin Wall Flue</a> Download	1 6 5 5 8	T_PCS 125/45/0.5/316/BA/EX	
3				
165584		T_PCS 125/45/0.5/316/BLACK/EX	53.14	
165585		T_PCS 150/45/0.5/316/BA/EX	42.58	



165586	T_PCS 150/45/0.5/316/BLACK/EX	53.23
165587	T_PCS 175/45/0.5/316/BA/EX	56.92
165588	T_PCS 175/45/0.5/316/BLACK/EX	71.14
165589	T_PCS 200/45/0.5/316/BA/EX	62.83
165590	T_PCS 200/45/0.5/316/BLACK/EX	78.54
165591	T_PCS 125/90/0.5/316/BA/EX	36.16
165592	T_PCS 125/90/0.5/316/BLACK/EX	45.20
165593	T_PCS 150/90/0.5/316/BA/EX	38.19



165594	T_PCS 150/90/0.5/316/BLACK/EX	47.74
165595	T_PCS 175/90/0.5/316/BA/EX	50.89
165596	T_PCS 175/90/0.5/316/BLACK/EX	63.62
165597	T_PCS 200/90/0.5/316/BA/EX	54.67
165598	T_PCS 200/90/0.5/316/BLACK/EX	68.35
165599	END_CAP_TEE 125/___/1/304/BA/EX	6.68
165600	END_CAP_TEE 125/___/1/304/BLACK/EX	8.34
165601	END_CAP_TEE 150/___/1/304/BA/EX	6.68
165602	END_CAP_TEE 150/___/1/304/BLACK/EX	8.34



165603	END_CAP_TEE 175/___/1/304/BA/EX	8.02
165604	END_CAP_TEE 175/___/1/304/BLACK/EX	10.02
165605	END_CAP_TEE 200/___/1/304/BA/EX	8.19
165606	END_CAP_TEE 200/___/1/304/BLACK/EX	10.24
165513	CONDENS_COL_W_DR 125/90/0.5/316/BA/EX	12.80
165514	CONDENS_COL_W_DR 125/90/0.5/316/BLACK/EX	15.99
165515	CONDENS_COL_W_DR 150/90/0.5/316/BA/EX	13.12
165516	CONDENS_COL_W_DR 150/90/0.5/316/BLACK/EX	16.40
165517	CONDENS_COL_W_DR 175/90/0.5/316/BA/EX	15.65



165518	CONDENS_COL_W_DR 175/90/0.5/316/BLACK/EX	19.56
165519	CONDENS_COL_W_DR 200/90/0.5/316/BA/EX	16.27
165520	CONDENS_COL_W_DR 200/90/0.5/316/BLACK/EX	20.34

Vantage is a quality twin wall chimney system with a quick lock jointing system. It is used for wood burning or for solid fuel stoves.

With a quick lock jointing system. The components have a twin wall construction with a male spigot and a female socket to provide simple and rapid installation.

With its fully sealed components, Vantage can be installed both internally and externally. Vantage is supplied with a ten year conditional warranty.

**PRODUCT DESCRIPTION**

**Applications**

- Gas-fired stoves
- Wood-fired stoves
- Approved solid fuels
- Oil-fired appliances

**Key features**

- 10 year warranty
- Suitable for internal and external applications Distance to combustibles 60mm (50mm in free air)
- Also available in black powder coated finish
- Easy to install Twist-lock system Weatherproof, fully sealed components High density, mineral wool insulation Made from high grade stainless steel
- 316L stainless steel inner wall for the highest corrosion resistance
- 304 stainless steel outer wall in an attractive, polished finish

**Technical characteristics**

Application	Chimney/Flue system
Operating mode	Dry
Pressure	Negative pressure



Operating Temperature	450 oC / 600 oC			
Thermal Shock	1000 oC [max 30 min]			
Inner Wall	material	AISI 316L/EN 1.4404		
	thickness	0.5 mm		
Outer wall	material	AISI 304 BA/EN 1.4301		
	thickness	0.5 mm		
Insulation	type	Mineral wool		
	thickness	25 mm		
Fuel Type	Wood/Gas/Oil/Approved Solid Fuels			
ID mm	125(5")	150(6")	175(7")	200(8")
OD mm	175	200	230	250
Cross section cm <sup>2</sup>	123	177	241	314
Weight ±kg/m	5.5	6.5	7.5	8.0

#### Chimney diameter

The chimney size should be as recommended by the appliance manufacturer. Where there is a requirement for a flue diameter smaller than the appliance spigot, then the operational requirements of the appliance and the configuration of the flue must satisfy the flue sizing requirements of EN13384–1 for single appliances.

#### CE approved

EN1856: T450 N1 D V3 L50050 G50 [in free air]

EN1856: T450 N1 D V3 L50050 G60 [in a combustible shaft with ventilated fire stops]

EN1856: T600 N1 D V3 L50050 G100 [in a combustible shaft with ventilated fire stops]