





Vantage Ventilated ceiling supports

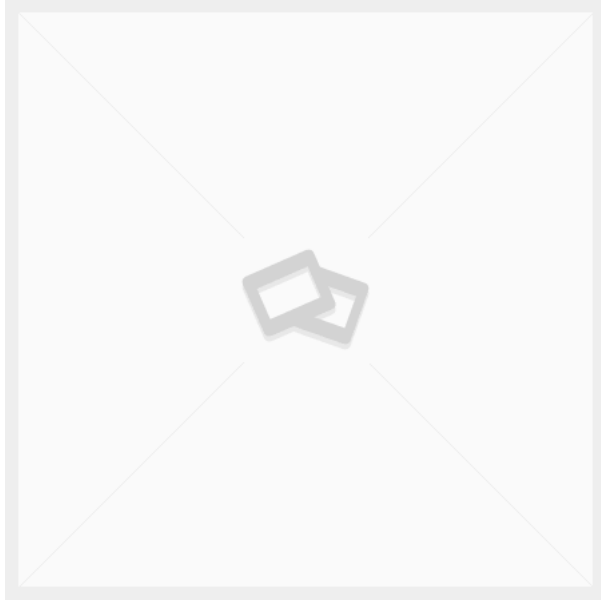

Stocks available. Please contact us on 0191 4161150 or email [sales.uk@schiedel.com](mailto:sales.uk@schiedel.com) to purchase this product. List pricing is shown below.

Download the brochure for dimensions and other details.

	<a href="#">Vantage Twin Wall Flue Download</a>	1 6 5 3 6	CEAL_VENT_PLATE 125/45/2/304/BA/EX	
9	165370	CEAL_VENT_PLATE 125/45/2/304/BLACK/EX	12.14	
165371	CEAL_VENT_PLATE 150/45/2/304/BA/EX	9.84		
165372	CEAL_VENT_PLATE 150/45/2/304/BLACK/EX	12.31		



165373	CEAL_VENT_PLATE 175/45/2/304/BA/EX	10.07
165374	CEAL_VENT_PLATE 175/45/2/304/BLACK/EX	12.59
165375	CEAL_VENT_PLATE 200/45/2/304/BA/EX	10.82
165376	CEAL_VENT_PLATE 200/45/2/304/BLACK/EX	13.53
165397	VENT_PLATE 125/___/1.5/304/BA/EX	10.82
165398	VENT_PLATE 125/___/1.5/304/BLACK/EX	13.53
165399	VENT_PLATE 150/___/1.5/304/BA/EX	11.80
165400	VENT_PLATE 150/___/1.5/304/BLACK/EX	14.75
165401	VENT_PLATE 175/___/1.5/304/BA/EX	12.79



165402	VENT_PLATE 175/___/1.5/304/BLACK/EX	15.98
165403	VENT_PLATE 200/___/1.5/304/BA/EX	13.77
165404	VENT_PLATE 200/___/1.5/304/BLACK/EX	23.73

Vantage is a quality twin wall chimney system with a quick lock jointing system. It is used for wood burning or for solid fuel stoves.

With a quick lock jointing system. The components have a twin wall construction with a male spigot and a female socket to provide simple and rapid installation.

With its fully sealed components, Vantage can be installed both internally and externally. Vantage is supplied with a ten year conditional warranty.

## PRODUCT DESCRIPTION

### Applications

- Gas-fired stoves
- Wood-fired stoves
- Approved solid fuels
- Oil-fired appliances

### Key features

- 10 year warranty
- Suitable for internal and external applications Distance to combustibles 60mm (50mm in free air)
- Also available in black powder coated finish
- Easy to install Twist-lock system Weatherproof, fully sealed components High density, mineral wool insulation Made from high grade stainless steel
- 316L stainless steel inner wall for the highest corrosion resistance
- 304 stainless steel outer wall in an attractive, polished finish

### Technical characteristics

Application	Chimney/Flue system
Operating mode	Dry
Pressure	Negative pressure
Operating Temperature	450 oC / 600 oC
Thermal Shock	1000 oC [max 30 min]



Inner Wall	material	AISI 316L/EN 1.4404			
	thickness	0.5 mm			
Outer wall	material	AISI 304 BA/EN 1.4301			
	thickness	0.5 mm			
Insulation	type	Mineral wool			
	thickness	25 mm			
Fuel Type	Wood/Gas/Oil/Approved Solid Fuels				
ID mm	125(5") 150(6") 175(7") 200(8")				
OD mm	175	200	230	250	
Cross section cm <sup>2</sup>	123	177	241	314	
Weight ±kg/m	5.5	6.5	7.5	8.0	

#### Chimney diameter

The chimney size should be as recommended by the appliance manufacturer. Where there is a requirement for a flue diameter smaller than the appliance spigot, then the operational requirements of the appliance and the configuration of the flue must satisfy the flue sizing requirements of EN13384–1 for single appliances.

#### CE approved

EN1856: T450 N1 D V3 L50050 G50 [in free air]

EN1856: T450 N1 D V3 L50050 G60 [in a combustible shaft with ventilated fire stops]

EN1856: T600 N1 D V3 L50050 G100 [in a combustible shaft with ventilated fire stops]