




Adjustable Wall Band

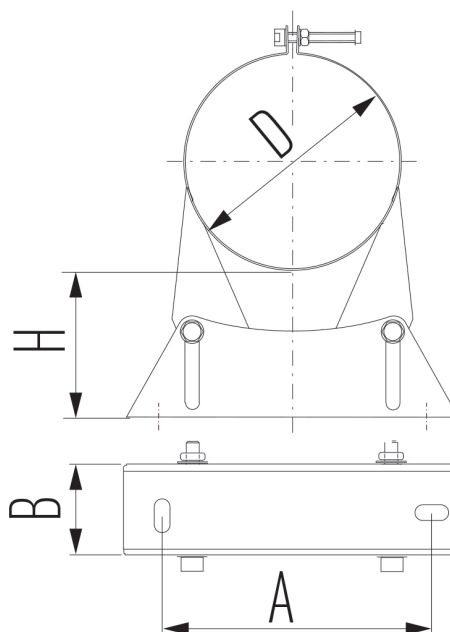

The Metaloterm UE system is a modular twin wall flue system, made of stainless steel with an air gap insulation and sealing ring.

Metaloterm UE is suitable for low temperatures, condensing and non- condensing applications with flue gasses in positive or negative pressure. The system is suited for a wide range of applications such as condensing heaters and boilers, gas-fired stoves and ventilation systems.

Applications

- Gas fired stoves
- Oil fired stoves
- Industrial ventilation systems
- Air inlet or ventilation system
- Condensing heaters and boilers
- Atmospheric gas-fired boilers

Advantages

- Universal applicable flue-system
- Compatible with Metaloterm ME, Metaloterm MF
- Pressure-tight up to 5000 Pa
- Inner- and outer wall from high quality stainless steel
- Stress free thermal expansion
- Extremely low heat mass maintains draught and allows longer runs of installed flue

VARIATIONS

SKU	Int mm	D	A	B	H	Price
163420	080	95	115	35	25-50	



SKU	Int mm	D	A	B	H	Price
163421	100	115	115	35	25-50	
163422	130	145	115	35	25-50	
163423	150	165	160	55	50-90	
163424	180	195	160	55	50-90	
163425	200	215	160	55	50-90	
163426	250	265	160	55	50-90	

PRODUCT DESCRIPTION

The Metaloterm® UE system is a modular twin wall flue system, made of stainless steel with an air gap insulation and sealing ring. Metaloterm® UE is suitable for low temperatures, condensing and non- condensing applications with flue gasses in positive or negative pressure. The system is suited for a wide range of applications such as condensing heaters and boilers, gas-fired stoves and ventilation systems.

 UE brochure Download	UE DXF files Download
 UE DOPs and certificates Download	CE approved EN 1856-1: T200 P1/H1 W V2 L50040 O25 T250 N1 W V2 L50040 O25 T400 N1 W V2 L50040 O130 T400 N1 D V3 L50040 G130

CE approved | EN 1856-2

T200 P1/H1 W V2 L50040 O50 M
T400 N1 W V2 L50040 O200 M
T400 N1 D V3 L50040 G200 M